

Hydrostatic Level Transmitter



Description:

Model LV36 submersible liquid level transducers and transmitters with flush diaphragm is designed for a wide variety of level measurement applications. This model pressure sensor and is protected by the stainless steel (SS) housing. Featuring the flush diaphragm makes the LV36 suitable to measure viscous media or media with small particles, so as to have diverse measurement applications.

The standard reference pressure is gauge (or relative) pressure realized through a vent tube in the cable. The reference pressure can also be absolute pressure on request.

The measuring range of LV36 transmitters spans from 0~1 to 0~200 meter water column (mH₂O) with measuring accuracy of 0.5%fs (fs = full scale). The output signal of transmitters can be configured to either current loop (4~20mA, standard), voltage output (0.5~4.5V, 1~5V), or digital output (I²C or SPI). The millivolt signal directly from the Wheatstone ridge circuit is also available on request (transducer version).

Features :

- measuring ranges: 0~1m, 2m, 3m, 5m, 6m, 8m, 10m, 12m 15m Higher length on request
- output signal: 4~20mA (standard), other o/p optional (~80mV @5Vdc) available on request
- accuracy: 0.5%fs
- compensated temperature range: 0~70°C
- materials: 316L SS (pressure membrane), 316 SS (housing)
- construction: all stainless steel housing, rigid and robust
- environment protection: IP68



Technical Data

Parameters		Units	Specifications
measuring media			viscous fluid, or fluid with particles which is compatible with 316L SS
measuring ranges*		mH ₂ O	1m, 2m, 3m, 5m, 6m, 8m, 10m, 12m, 15m
overload		%fs	150
output signal	for transmitters		4~20mA (standard).
	for transducers	mV/V	≥ 15
power supply	for transmitters	Vdc	24 (typical), 12, ..., 36
	for transducers	Vdc	5, ..., 10
excitation	for transmitters	mA	0.5, ..., 2
	for transducers		
accuracy		%fs	≤ ±0.5
long-term stability		%fs/year	≤ ±0.2 (standard), ≤ ±0.1 is available on request
response time		ms	< 1 (10%~90% of leading edge)
input resistance	for transducers	Ω	2000~8000
output resistance	for transmitters	Ω	3500~6000
load resistance	for transmitters	Ω	250~1150
insulation resistance		MΩ @500Vdc	> 500 (transducer only)
storage temperature range		°C	-40~+100
operating temperature range		°C	-20~+85
compensated temperature range		°C	0~70
temperature coefficient of zero		%fso/C	≤ ±0.02
temperature coefficient of span		%fso/C	≤ ±0.02
process connection			submersible in
electrical connection			Φ7.3mm, 4-core shielded black PVC cable with/without a vent tube
membrane material			316L SS
housing material			316 SS
environment protection		IP rating	IP68
weight (without cable)		gram	~250

Hydrostatic Level Transmitter




Ordering Information

position (pos.) 1: model					
LV36					
pos. 2: measuring ranges					
0-1m, 2m, 3m, 5m, 6m, 8m, 10m, 12m 15m					
pos. 3: pressure referene					
G: gauge pressure (standard)			A: absolute pressure		
pos. 4: output signal					
4/20mA (standard)		1/5V	0.5/4.5V	I ² C	SPI
pos. 5: accuracy					
0.5%fs					
pos. 6: electrical interface					
<p>Φ7.3/2(*)/PVC/vent/2m = Φ7.3mm, 2-core(*) shielded black PVC cable, with a vent tube (for gauge pressure), cable length = 2m, this length is determined by customers.</p> <p>(*): 2-core cable for 4~20mA output; 3-core cable for 0~5V or 0~10V output;</p>					
pos.1	pos. 2	pos. 3	pos. 4	pos. 5	pos. 6

The listed specifications and dimensions are subject to change without prior notice.

Make : BCM Sensor, Belgium

Dimensions

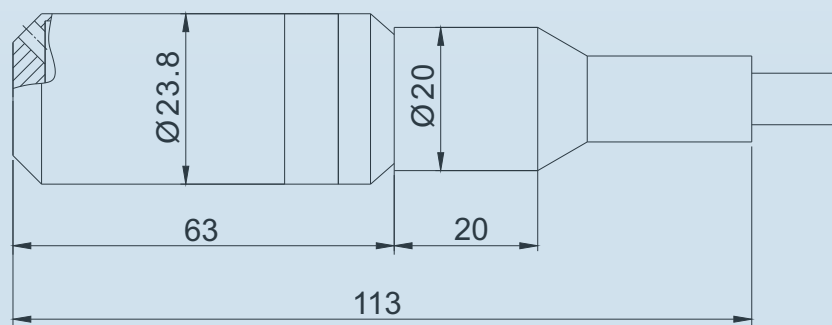

Note: All dimensions are in mm.

Filpro Sensors Pvt. Ltd.

No 130, 10th Cross, Petechennappa Industrial Estate, Kamakshipalya,
Magadi Main Road, Bangalore - 560 079. Phone : 080 23286463

E-mail : sales@filprosensors.com

Website : www.filprosensors.com



An ISO 9001:2015 Company